



BUA MORTAR

General Plastering

Bua mortar Cement for General plastering
mix with water and be ready to use.

บัวฉาบ



Properties and usage


Bua mortar - General plastering is the premium dry mortar manufactured with high technology with additive chemical products for increasing the hygroscopic properties, adhesion, and formation to be appropriated for plastering to general bricks. Bua mortar is smooth, clay slip, high adhesion, easy to laying, quick and strong surface. Bua mortar-general plastering brand is ready mixed mortar specific design for red brick and concrete block masonry.



1
Mix 1 bag of Bua Mortar General Plastering with approximately 9-11 litres of clean water.



2
Mix Bua Mortar General Plastering until achieving a homogeneous texture

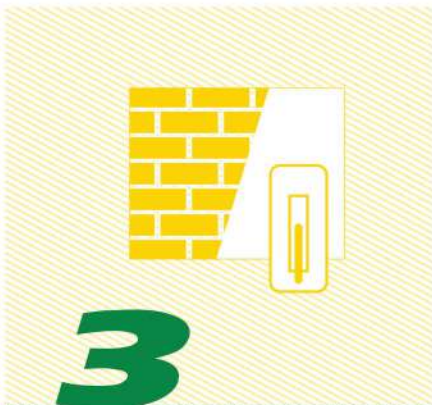

3
Plaster according to general plastering procedures with a thickness about 10-15 mm.

Application area size

Plastering thickness 10 mm

get an area of 2.5-3.0 square meter/bag

Plastering thickness 15 mm

get an area of 1.7-2.0 square meter/bag

Cautions

- After opening bag, it is better to finish it within 2 hr.
- Use Clean brick, clean water and clean area
- For brick laying and coating work, should be cured by spraying water for at least 3 days.